




DATASHEET

TRASSIR NeuroStation 8800R/128 INT TRASSIR NeuroStation 8864R/128 INT



TRASSIR NeuroStation 8800R/128 INT, TRASSIR NeuroStation 8864R/128 INT are the network video recorders for IP-cameras under TRASSIR OS (Linux) that support processing video analytics based on neural networks¹. Up to 128 IP cameras are available for recording and playback. The installation of up to 8 3.5" HDDs is available. Can be installed in 19", 2U rack.

Rear panel²

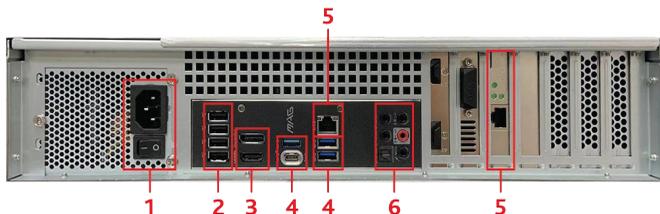

1. 220V power supply
2. USB 2.0
3. Video output interfaces
4. USB 3.2
5. RJ-45 for Ethernet
6. Audio inputs / outputs

Basic equipment

- Network video recorder (assembled and packaged) 1pcs.
- Mouse (USB) 1pcs.
- Keyboard (USB)..... 1pcs.
- Power cord 2pcs.
- 19" telescopic rails..... 1pcs.
- Datasheet 1pcs.
- Warranty card 1pcs.

Warranty service:

- Specify the information about the warranty on www.trassir.com.

¹ A complete list of supported video analytics modules can be found on www.trassir.com.

² All rights reserved. Design and specifications are subject to change without notice.

Specification

| | | Общие характеристики |
|--|--|----------------------|
| Operating system | TRASSIR OS based on OS Linux) | |
| IP video input³ | Up to 128 IP channels | |
| Working temperature | 10...30°C | |
| USB interfaces | 3 USB 3.2 Gen1, 4 USB 2.0 (Type A) on rear panel 2 USB 2.0 (Type A) on front panel | |
| Net / Gross weight, kg⁴ | 13,5/17.8 | |
| Package / device dimensions (WxDxH), mm | 565x710x195 / 485x555x90 | |
| | | Recording |
| Resolution of cameras | No limits (depending on camera model ⁵) | |
| Bitrate | 720 Mbps | |
| Playback rate | -32x - 32x | |
| | | Audio / Video |
| Video compression | H.265+, H.265, H.264, MPEG4 or MJPEG (depending on IP camera ⁵) | |
| Audio compression | G711a, G711u, PCM, AAC, G722.1 G726 MP2L2 | |
| Video output⁶ | 1x DisplayPort, 1x HDMI | |
| Maximum video output resolution | DisplayPort,HDMI - 4K | |
| Audioinputs / Audiooutputs | 1 IN (jack 3.5мм) 1 OUT (jack 3.5мм) | |
| | | Network |
| Network interfaces | 2 Ethernet 10/100/1000 Mbps | |
| Network protocols | TCP/IP, IPv4/v6, UDP, DHCP, CloudConnect, DNS, NTP, SADP, SMTP, iSCSI, UPnP, HTTP/HTTPS, RTSP, ONVIF | |
| | | Storage |
| HDD | Up to 8 HDDs | |
| | | Power supply |
| Power supply | 220V | |
| Power consumption | 600 W | |
| | | Features |
| Remote connection | Trassir client, Android / iOS mobile app TRASSIR Cloud cloud connection Up to 100 connections per server | |
| SSL encryption support | Yes | |
| Video analytics | Up to 2 channels of TRASSIR Neuro Detector (licenses included) ⁷ . Other modules are optional. | |

³ TRASSIR NeuroStation 8864R/128 has 64 licenses included to connect any cameras.

⁴ Depending on the accessories used, the weight of the video recorder may vary by ±10%.

⁵ You can find the list of the supported IP cameras and available working modes on www.trassir.com.

⁶ You can connect up to 2 monitors to the video recorder.

⁷ he number of channels may vary depending on conditions and the software version. Please contact your sales representative for exact calculations.

| | |
|---------------------------|----------------------|
| DATE OF PRODUCTION | SERIAL NUMBER |
| KEY NUMBER | |

[Learn more about analytics](#)

