




DATASHEET TRASSIR DuoStation 2416R-16P



TRASSIR DuoStation 2416R-16P is a network video recorder for building CCTV systems. Up to 16 channels in up to 4K resolution are available for record, playback and display.

Rear panel¹:

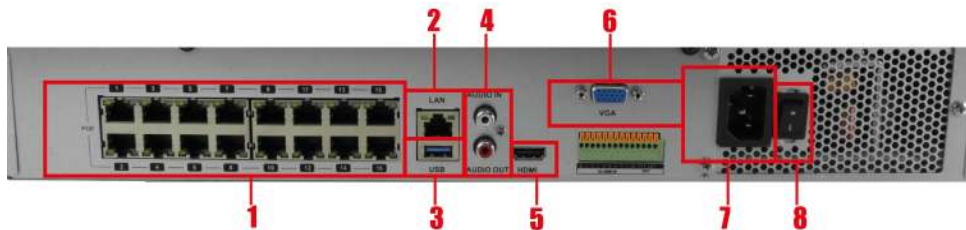

- | | |
|-------------------------------|----------------------|
| 1. RJ-45 (PoE) for IP cameras | 5. HDMI |
| 2. RJ-45 for Ethernet | 6. D-SUB (VGA) |
| 3. USB 3.0 | 7. 220V power supply |
| 4. Audioinput/audiooutput | 8. ON/OFF button |

Basic equipment:

- ◆ Network Video Recorder on TRASSIR OS (assembled and packaged) 1pcs.
- ◆ Power cord 1pcs.
- ◆ Mouse 1pcs.
- ◆ Set of fixing elements for 19" rack..... 1pcs.
- ◆ HDD 3.5" / 2.5" mounting screws..... 16pcs.
- ◆ Datasheet 1pcs.

¹ All rights reserved. Design and specifications are subject to change without notice.

Specification:

		General
Operating system	TRASSIR OS (based on Linux OS)	
Maximum video capacity	H.264: 16 8MP@15fps IP cameras or 1 12MP@15fps IP camera + 15 8MP@15fps IP cameras	H.265: 16 8MP@15fps IP cameras
Video compression	H.264 / H.265	
IP video input	16 IP-cameras ²	
Remote connection³	Connection, viewing live video/archive (no more than 5 connections at the same time): <ul style="list-style-type: none"> • TRASSIR Client app • Web browser • Android / iOS mobile app • Cloud connection 	
Power supply	AC 220 V	
Power consumption	Up to 280 W	
Working temperature	0...30°C	
Device dimensions (WxDxH), mm	442 x 456 x 81	
Package dimensions, mm	535 x 526 x 202	
Net / Gross weight, kg	5.55 / 7	
		Videooutputs / Audiooutputs
Video output	1 D-SUB(VGA) and 1 HDMI, duplicate/independent ⁴	
Maximum video output resolution	D-SUB(VGA): 1024x768, 1280x720, 1280x800, 1280x1024, 1366x768, 1440x900, 1920x1080 HDMI: 1024x768, 1280x720, 1280x800, 1280x1024, 1366x768, 1440x900, 1920x1080, 2560x1600, 3840x2160	
Audio inputs/Audio outputs	1 IN (RCA), 1 OUT (RCA)	
		Recording
Number of streams	2	
Main steam resolution	Up to 12MP ⁵	
Sub stream resolution	Up to 720p ⁵	
Stream type	Video, video and audio	
Bitrate per channel	<ul style="list-style-type: none"> • Main stream: up to 8 Mbps • Sub stream: up to 1 Mbps 	
Audio bitrate	Depending on connected IP cameras	
		Playback
Realtime video	<ul style="list-style-type: none"> • Main stream: 1 channel • Sub stream: up to 16 channels(720p) 	
Archive	<ul style="list-style-type: none"> • Main stream: 1 канал • Sub stream: up to 16 channels (720p) 	
		Interfaces
Network interface	1 Ethernet 10/100/1000 Mbps 16 Ethernet 10/100/1000 Mbps, supporting PoE 802.3af (up to 13V each)	
USB interface	1 USB 2.0 on front panel 1 USB 3.0 on rear panel	
		HDD
Storage capacity	4 2.5"/3.5" HDDs up to 8TB (up to 10V in working mode) ⁶	

² The video recorder supports ActiveCam, TRASSIR, Hikvision, HiWatch, Dahua, Wisenet-samsung IP-cameras and also ONVIF and RTSP cameras.

³ Read more in the corresponding user manuals.

⁴ The independent monitors can only be supported at 1920x1080 maximum resolution.

⁵ You can find the list of the supported IP cameras and available working modes on www.trassir.com.

⁶ You can find a list of the HDDs used to test the video recorder on www.trassir.com.

Warranty service:

- ◆ Specify the information about the warranty on www.trassir.com.

DATE OF PRODUCTION	SERIAL NUMBER
KEY NUMBER	