




DATASHEET TRASSIR PC Server 400R/32 INT



TRASSIR PC Server 7400R/32 INT is a network video recorder for building CCTV systems. Up to 32 IP cameras are available for recording and playback. The installation of up to 4 3.5" HDDs is available. Can be installed in 19", 2U rack.

Rear panel¹:

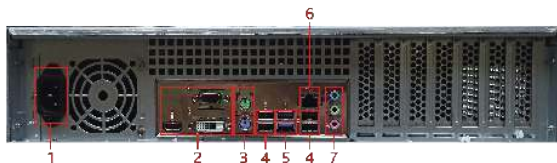

1. 220V power supply
2. Video output
3. PS/2 (keyboard and mouse)
4. USB 2.0 and 3.0 (Type-A)
5. USB 3.0 (Type-A)
6. RJ-45 for Ethernet
7. Audio inputs / outputs

Basic equipment:

- Network video recorder (assembled and packaged) 1pcs.
- Keyboard (USB)..... 1pcs.
- Mouse (USB) 1pcs.
- 19" telescopic rails..... 1pcs.
- Power cord 1pcs.
- Device datasheet 1pcs.
- Warranty card 1pcs.

Warranty service:

- Specify the information about the warranty on www.trassir.com.

¹ All rights reserved. Design and specifications are subject to change without notice.

Specification:

		General
Operating system	TRASSIR OS (based on OS Linux)	
IP video input	Up to 32 IP-channels	
Working temperature	10...30°C	
USB interfaces	4 USB 2.0 (Type-A), 2 x USB 3.2 Gen1 (Type-A) on rear panel 2 USB 2.0 (Type-A) on front panel	
Net / Gross weight, kg²	5 / 6.5	
Package / device dimensions (WxDxH), mm	540 x 520 x 175 / 482 x 390 x 89	
		Recording
Resolution of cameras	no limits (depending on camera model ³)	
Bitrate	640 Mbps	
Playback rate	-32x - 32x	
		Audio / Video
Video compression	H.265+, H.265, H.264, MPEG4 or MJPEG (depending on camera model ³)	
Audio compression	G711a, G711u, PCM, AAC, G722.1 G726 MP2L2	
Video output⁴	1 D-SUB 1 DVI, 1 HDMI (duplicate)	
Maximum video output resolution	D-SUB, DVI: FullHD, HDMI: 4K	
Audioinputs / Audiooutputs	1 IN (jack 3.5mm) 1 OUT (jack 3.5mm)	
		Network
Network interfaces	1 Ethernet 10/100/1000 Mbps	
Network protocols	TCP/IP, IPv4/v6, UDP, DHCP, CloudConnect, DNS, NTP, SADP, SMTP, iSCSI, UPnP, HTTP/HTTPS, RTSP, ONVIF	
		Storage
HDD	4 3.5" HDDs of any capacity	
		Power supply
Power supply	220V	
Power consumption	500W	
		Features
Remote connection	Trassir client, Android / iOS mobile app TRASSIR Cloud cloud connection Up to 100 connections per server	
SSL encryption support	Yes	

² Depending on the accessories used, the weight of the video recorder may vary by ±10%.

³ You can find the list of the supported IP cameras and available working modes on www.trassir.com.

⁴ You can connect up to 2 monitors to the video recorder. The connectors on video card are not designed for connecting monitors.

DATE OF PRODUCTION

SERIAL NUMBER

KEY NUMBER