


DATASHEET TRASSIR DuoStation AnyIP 16/24/32 RE



TRASSIR DuoStation RE is a network video recorder for building CCTV systems. Up to 32 channels are available for record, playback and display.

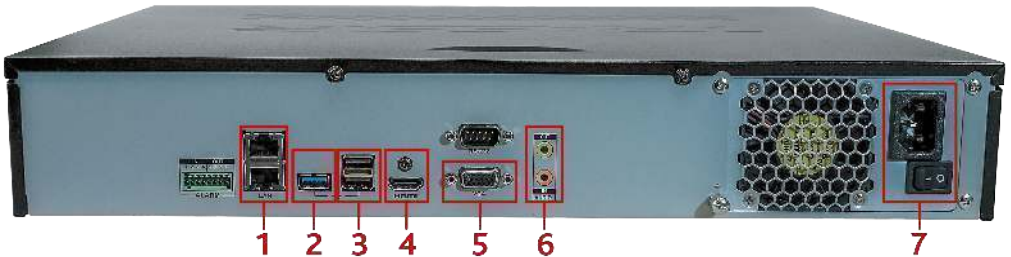

Rear panel:

- | | |
|--------------------------------|-----------------------------|
| 1. Network interface | 5. D-SUB interface |
| 2. USB 3.0 (Type-A) interface | 6. Audio input/output |
| 3. USB 2.0 (Type-A) interfaces | 7. AC 220V and power button |
| 4. HDMI interface | |

Specification:

Operating system	TRASSIR OS (based on Linux)
IP video input¹	16/24/32 ch (any models ²)
Resolution of cameras³	Up to 8 MP (depending on camera model ²)
Bitrate	Up to 512Mb/s
Video compression	H.265+, H.265, H.264, MPEG4 or MJPEG (depending on camera model ²)
Network interfaces	2 Ethernet 10/100/1000 Mb/s
USB interfaces	2 USB 2.0 and 1 USB 3.0
Maximum internal storage	Up to 4xHDD (2.5"/3.5")
Video output⁴	1 D-SUB 1 HDMI
Maximum video output resolution	HDMI / D-SUB: FullHD
Audio inputs/outputs	In: 1 jack 3.5mm ⁵ Out: 1 jack 3.5mm
Dimensions, mm	440 x 390 x 70
Power supply	AC 220V (75W)
Working temperature	+10...30°C
Package size, mm	502 x 495 x 158
Gross, kg	5 (without HDD)

¹ Depending on NVR model.

² You can find list of per-integrated cameras on www.trassir.com

³ Enable hardware acceleration in TRASSIR to view the video in the resolution of 8 megapixels.

⁴ The NVR can be connected to two independent displays.

⁵ NVR works only with the active microphone.

Basic equipment:

- Network Video Recorder 1pcs
- Power cord 1pcs
- SATA cables 4pcs
- HDD Screws 18pcs
- Set of fixing elements 1pcs
- Mouse 1pcs
- Datasheet for server 1pcs

Warranty service:

- Specify the information about the warranty on www.trassir.com.

DATE OF PRODUCTION	SERIAL NUMBER
<input type="text"/>	<input type="text"/>
KEY NUMBER	
<input type="text"/>	