




DATASHEET TRASSIR MiniNVR 2216R



TRASSIR MiniNVR 2216R is a network video recorder for building CCTV systems. Up to 16 channels in up to 4K resolution are available for record, playback and display.

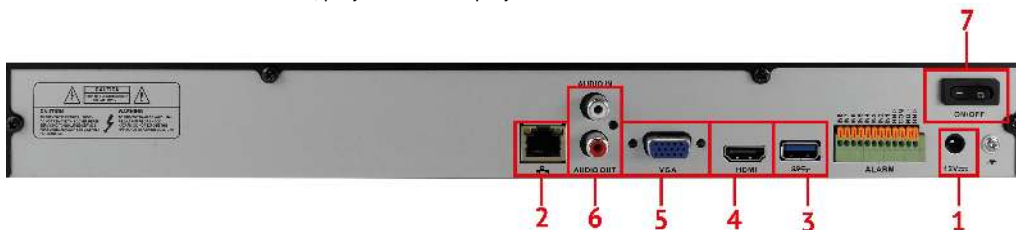

Rear panel¹:

- | | |
|-------------------------------|-----------------------------|
| 1. 12V power supply interface | 5. D-SUB(VGA) |
| 2. RJ-45 for Ethernet | 6. Audioinput / Audiooutput |
| 3. USB 3.0 | 7. ON/OFF button |
| 4. HDMI | |

Basic equipment:

- ◆ Network Video Recorder on TRASSIR OS (assembled and packaged) 1pc.
- ◆ 12V (5A) power supply unit 1pc.
- ◆ Power cord 1pc.
- ◆ Mouse 1pc.
- ◆ Set of fixing elements for 19" rack..... 1pc.
- ◆ HDD 3.5" / 2.5" mounting screws..... 8pcs.
- ◆ Datasheet 1pc.

¹ All rights reserved. Design and specifications are subject to change without notice.

Specification:

		General
Operating system	TRASSIR OS (based on OS Linux)	
Maximum video capacity	H.264: 16 8MP@15fps IP cameras or 1 12MP@15fps IP camera + 15 8MP@15fps IP cameras	H.265: 16 8MP@15fps IP cameras
Video compression	H.264 / H.265	
IP video input	16 IP cameras ²	
Remote connection³	Connection, viewing live video/archive (no more than 5 connections at the same time): <ul style="list-style-type: none"> • TRASSIR Client app • Web browser • Android / iOS mobile app • Cloud connection 	
Power supply	DC 12V	
Power consumption	Up to 60 W	
Working temperature	0...30°C	
Device dimensions (WxDxH), mm	382 x 332 x 47	
Package dimensions, mm	488 x 371 x 98	
Net / Gross weight, kg	2.05 / 3.15	

		Videooutputs / Audiooutputs
Video output	1 D-SUB(VGA) и 1 HDMI, duplicate/independent ⁴	
Maximum video output resolution	D-SUB(VGA): 1024x768, 1280x720, 1280x800, 1280x1024, 1366x768, 1440x900, 1920x1080 HDMI: 1024x768, 1280x720, 1280x800, 1280x1024, 1366x768, 1440x900, 1920x1080, 2560x1600, 3840x2160	
Audio inputs/Audio outputs	1 IN(RCA), 1 OUT(RCA)	

		Recording
Number of streams	2	
Main steam resolution	Up to 12MP ⁵	
Sub stream resolution	Up to 720p ⁵	
Stream type	Video, video and audio	
Bitrate per channel	<ul style="list-style-type: none"> • Main stream: up to 8 Mbps • Sub stream: up to 1 Mbps 	
Audio bitrate	Depending on connected IP camera	

		Playback
Realtime video	<ul style="list-style-type: none"> • Main stream: 1 channel • Sub stream: up to 16 channels (720p) 	
Archive	<ul style="list-style-type: none"> • Main stream: 1 channel • Sub stream: up to 16 channels(720p) 	

		Interfaces
Network interface	1 Ethernet 10/100/1000 Mbps	
USB interface	1 USB 2.0 on front panel 1 USB 3.0 on rear panel	

		HDD
Storage capacity	2 2.5"/3.5" HDDs up to 8TB (up to 10V in working mode) ⁶	

² The video recorder supports ActiveCam, TRASSIR, Hikvision, HiWatch, Dahua, Wisenet-samsung IP cameras and also ONVIF and RTSP cameras.

³ Read more in the corresponding user manuals.

⁴ The independent monitors can only be supported at 1920x1080 maximum resolution.

⁵ You can find the list of the supported IP cameras and available working modes on www.trassir.com.

⁶ You can find a list of the HDDs used to test the video recorder on www.trassir.com.

Warranty Service:

- ◆ Specify the information about the warranty on www.trassir.com.

<p>DATE OF PRODUCTION</p> <div style="border: 1px solid black; height: 30px; width: 90%; margin: 5px auto;"></div>	<p>SERIAL NUMBER</p> <div style="border: 1px solid black; height: 100px; width: 90%; margin: 5px auto;"></div>
<p>KEY NUMBER</p> <div style="border: 1px solid black; height: 60px; width: 90%; margin: 5px auto;"></div>	